

# Clear Tile LP25

## Application

The clear tile LP25 from J.A. Plast is used to improve the amount of daylight entering unheated roof space and attics.

*Please refer to national standards.*

- For pitched roofs
- Can be manufactured for any profile
- CE marked

## Design

The LP25 clear tile is shaped to fit the specific roofing profile. It is fixed to the batten with a clear strap, making installation quick and easy and integration with the roofing profile complete. The LP25 can be supplied as single tile or in modules from 2 to 8 tiles wide.

Max. width 1350 mm.

## Colour and Surface

The clear tile is transparent.

## Materials

Clear tiles of 1 or 2 modules are manufactured from acrylic.

Clear tiles of 3 to 8 modules are manufactured from polycarbonate with a protective filter of acrylic.




Both types have supreme durability and UV resistance and are impact-proof towards hailstorm and rough weather - well protected from cracking.

## Handling

Keep in original packaging during transport.

Do not wrap and expose to heavy load during transport.

Do not store in sunlight. Remove protective foil before exposing to sunlight.

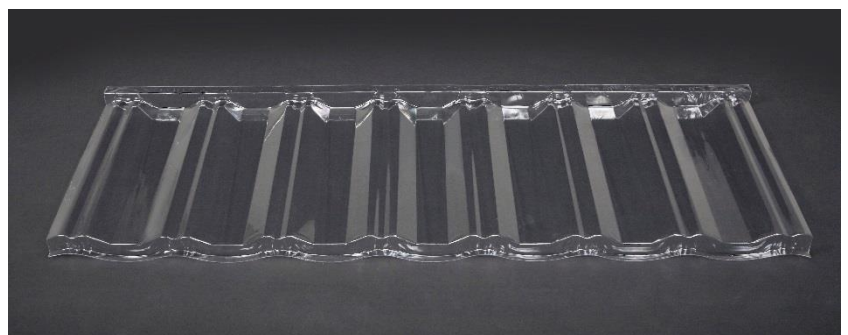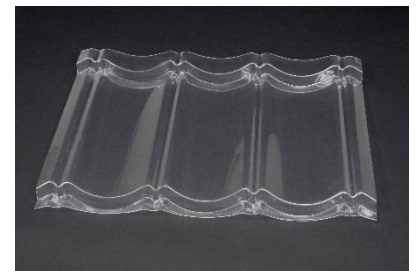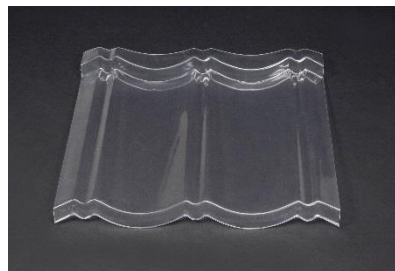

*Roofing accessories supplied from J.A. Plast match roof profile, colour and surface 100%. The current product list and further information can be found on our homepage, [www.japlast.com](http://www.japlast.com).*