

Installation of Roof Window DA1



For quick and easy installation the DA1 has an inside frame of 12 mm plywood.

The frame provides stability to the construction and adds a nice finish to the opening.

Fix the frame securely to the battens with suitable nails or screws.

Shortened battens

Inserted battens

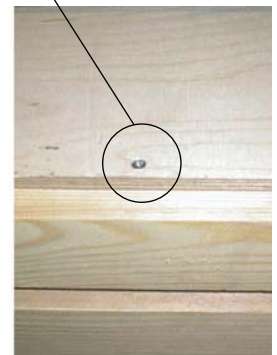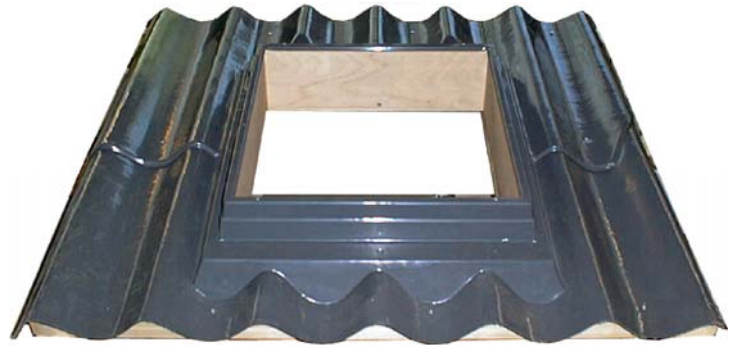

The construction with the plywood frame makes the roof window strong enough to withstand a vertical perpendicular load of minimum 1.5 kN and a horizontal load of minimum 0.3 kN, in compliance with DIN 18160-5 specifications.

Do not store in sunlight. Remove protective foil before exposing to sunlight.

