

Roof Escape Window DA1

Application

The DA1 window from J.A. Plast improves the amount of daylight entering unheated roof space and attics.

Please refer to national standards.

- For pitched roofs
- Quick and easy installation
- Manufactured for corrugated sheets only

Design

The DA1 window opening is 510x466 mm. The dome is installed on a base plate shaped to match the roofing profile 100% - corrugated sheets and steel roofing in particular. It is fixed like the rest of the roofing elements, making installation quick and easy, and integration with the roofing profile complete.

A 12 mm plywood frame provides stability and adds a nice finish to the opening.

Colour and Surface

The base plate can be special coloured, glossy or structured with sand or granules for a 100% colour and surface match individually adjusted to each roofing material.

The dome is transparent.

Materials

The base plate is manufactured from HIPS (High Impact Polystyrene).

The dome is manufactured from polycarbonate with a filter of acrylic. The combination has a supreme durability and UV resistance and is impact-proof towards hailstorm and rough weather.


The frame is manufactured from plywood.

Handling

Keep in original packaging during transport.

Do not wrap and expose to heavy load during transport.

Do not store in sunlight. Remove protective foil before exposing to sunlight.

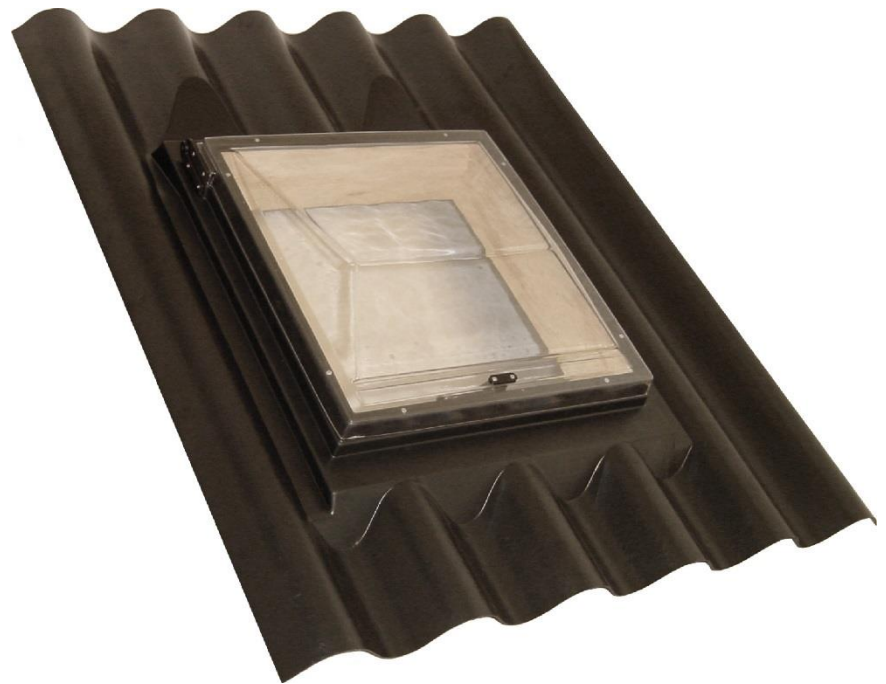

The window is top hung and opens outwards. Opener is fixed from factory. A split pin ensures that the window is easily opened wide to give access to the roof.

Roofing accessories supplied from J.A. Plast match roof profile, colour and surface 100%. The current product list and further information can be found on our homepage, www.japlast.com.